


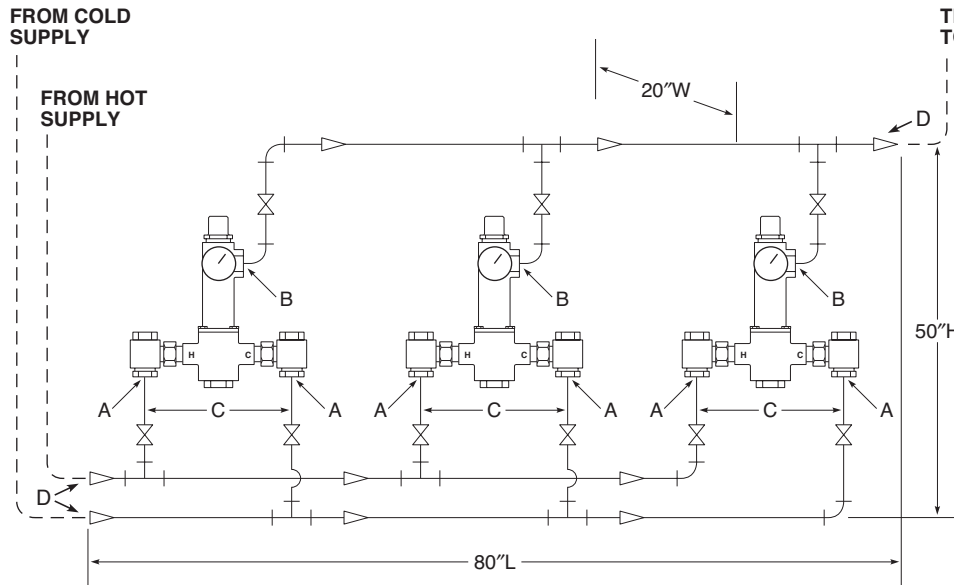
# Thermostatic Water Controller Series 800 High-Low Water Mixer Triple Valve Installation


ENG. NO. 00000-A  
PAT. NO. 5,203,496.  
PAT. NO. 5,323,960.  
PAT. NO. 6,637,668.

801, 802, 804 & 805 are  **ASSE 1017 Approved**



**Certified to  
CSA B125.3**



 = Thermometer

1. For recirculation refer to the typical installation shown in the series 800 brochures and installation manuals.
2. Triple valve system comes pre piped from factory.

Master water mixing valve shall be of the thermostatic type with liquid-filled thermal motor. It shall have bronze body construction with replaceable corrosion-resistant components. Valve construction shall employ a sliding piston control mechanism. Sliding piston and liner shall be of stainless steel material. Valve shall come equipped with union end stop and check inlets with removable stainless steel strainers. Valve shall control temperature from a low flow up to a maximum flow rate for a given pressure differential. Valve shall provide protection against hot or cold supply line failure and thermostat failure.

Unit shall be supplied pre piped from factory.

**FINISH:**      Bronze        
                   Chrome        
                   Other       

**MINIMUM FLOW:**

- 1/2 gpm for all assemblies when properly piped in recirculated system
- 3 gallons per minute Model 801
- 6 gallons per minute Model 802
- 12 gallons per minute Model 804
- 15 gallons per minute Model 805

**TEMP. RANGE**

- 70° to 100°F
- 90° to 120°F
- 110° to 140°F

**SET POINT**

- 80°F
- 110°F
- 130°F

**DIMENSIONS:**

Valve Number	A N.P.T.	B N.P.T.	C	D
801	3/4"	1"	10"	2"
802	1"	1 1/4"	11"	2"
804	1 1/2"	2"	15"	3"
805	2"	2"	15"	3"

Unit is 80"L x 20"W x 50"H

**CAPACITIES – SERIES 800 Tri-Parallel**

Pressure Drop PSI	5	10	20	30	45	60	80
Valve Number	Capacity-GPM (x3)						
801	17	25	34	40	50	57	65
802	28	39	54	66	80	91	103
804	52	72	100	124	150	174	193
805	64	96	133	165	200	230	265



**MANUFACTURING CO., INC.**

5330 East 25th Street  
Indianapolis, Indiana 46218  
Phone (317) 261-1212  
Fax (317) 261-1208

Design and specification subject to change without notice.